

LED间隔柱 LED SPACER SUPPORT



MATERIAL : NYLON 66(UL)


FLAME CLASS : 94V-0,94V-2

COLOR : BLACK,NATURAL

UNIT : mm

用途 : 使LED固定于PC板上, 高度一致, 不断脚。

1

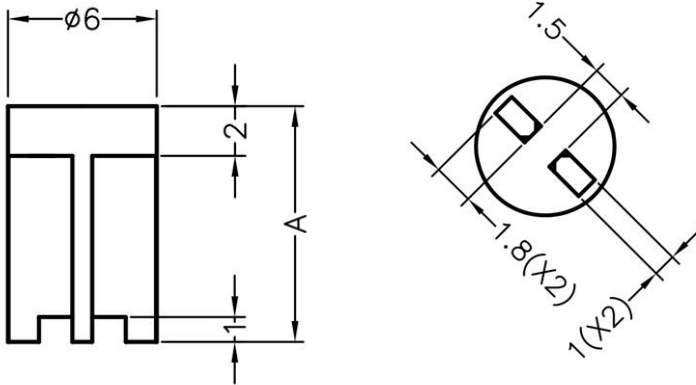

(规格 / 尺寸) 代码说明 :

L: LED建议装配规格 P : 装配灯数

| PART NO | A | L | P | PACKAGE |
|-----------|------|-----|---|---------|
| LEDSS-319 | 9.5 | 5.0 | 1 | 2000 |
| LEDSS-320 | 22.2 | 5.0 | 1 | 2000 |
| LEDSS-436 | 4.8 | 5.0 | 1 | 2000 |
| LEDSS-437 | 6.5 | 5.0 | 1 | 2000 |
| LEDSS-438 | 12.7 | 5.0 | 1 | 2000 |
| LEDSS-439 | 19.1 | 5.0 | 1 | 2000 |
| LEDSS-440 | 25.4 | 5.0 | 1 | 2000 |

LED间隔柱 LED SPACER SUPPORT




MATERIAL : NYLON 66(UL)

FLAME CLASS : 94V-0,94V-2

COLOR : BLACK,NATURAL

UNIT : mm

用途 : 用于保护Ø5mmLED 立于PC板上, 高度一致, 不断脚, 有遮光效果, 不漏光

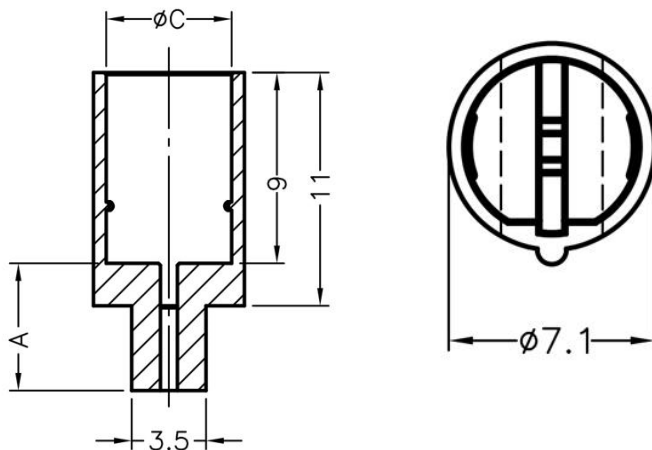

(规格 / 尺寸) 代码说明 :

L: LED建议装配规格 P : 装配灯数

| PART NO | A | C | L | P | PACKAGE |
|-----------|------|------|-----|---|---------|
| LEDSS-321 | 2.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-322 | 3.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-323 | 4.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-324 | 5.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-325 | 6.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-326 | 7.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-327 | 8.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-328 | 9.0 | Ø5.9 | 5.0 | 1 | 2000 |
| LEDSS-329 | 10.0 | Ø5.9 | 5.0 | 1 | 2000 |