

LED间隔柱 LED SPACER SUPPORT


用途：用于保护 $\varnothing 3\text{mm}$ LED 立于PC板上，接脚不会弯曲、折断、短路，且使LED高度一致，免用治具，尺寸齐全

MATERIAL : NYLON 66(UL)

FLAME CLASS : 94V-0,94V-2



COLOR : BLACK , NATURAL

UNIT : mm

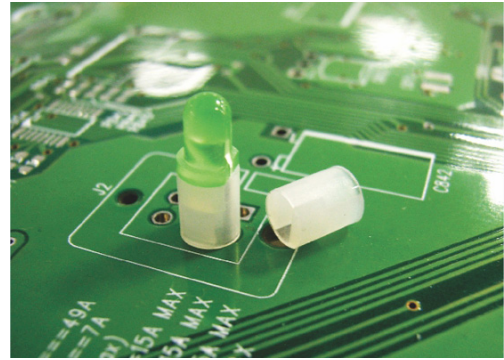

1

PART NO	A	L	P	PACKAGE
LEDSS-341	3.0	3.0	1	2000
LEDSS-342	4.0	3.0	1	2000
LEDSS-343	4.5	3.0	1	2000
LEDSS-344	5.0	3.0	1	2000
LEDSS-345	5.5	3.0	1	2000
LEDSS-346	6.0	3.0	1	2000
LEDSS-347	6.5	3.0	1	2000
LEDSS-348	7.0	3.0	1	2000
LEDSS-349	7.5	3.0	1	2000
LEDSS-350	8.0	3.0	1	2000
LEDSS-351	8.5	3.0	1	2000
LEDSS-352	9.0	3.0	1	2000
LEDSS-353	9.5	3.0	1	2000
LEDSS-354	10.0	3.0	1	2000
LEDSS-355	11.0	3.0	1	2000
LEDSS-356	11.5	3.0	1	2000
LEDSS-357	12.0	3.0	1	2000
LEDSS-358	12.5	3.0	1	2000
LEDSS-359	13.0	3.0	1	2000
LEDSS-360	13.5	3.0	1	2000
LEDSS-361	14.5	3.0	1	2000
LEDSS-362	15.0	3.0	1	2000
LEDSS-363	15.5	3.0	1	2000
LEDSS-364	16.0	3.0	1	1000
LEDSS-365	16.5	3.0	1	1000
LEDSS-366	17.0	3.0	1	1000
LEDSS-367	17.5	3.0	1	1000
LEDSS-368	18.0	3.0	1	1000
LEDSS-369	18.5	3.0	1	1000
LEDSS-370	19.0	3.0	1	1000
LEDSS-371	20.0	3.0	1	1000
LEDSS-372	20.5	3.0	1	1000
LEDSS-373	21.0	3.0	1	1000
LEDSS-374	21.5	3.0	1	1000
LEDSS-375	22.0	3.0	1	1000
LEDSS-376	22.5	3.0	1	1000
LEDSS-377	23.0	3.0	1	1000

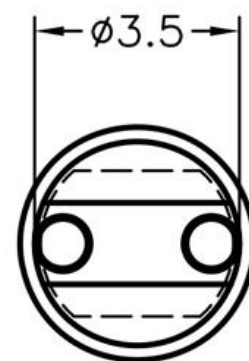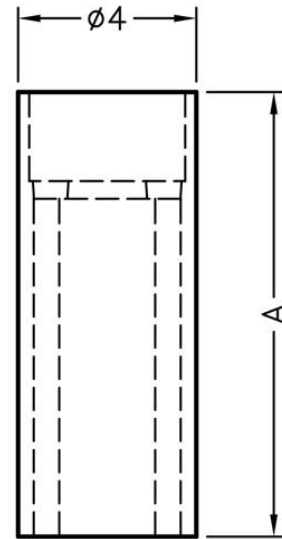

(规格 / 尺寸) 代码说明：

L: LED建议装配规格 P : 装配灯数